

Tier1

BloombergNEF




ISO 9001 ISO 14001 SA 8000
ISO 45001 OHSAS 18001

M10 TOPCON BIFACIAL


SPDGxxx-N144M10

- Double glass (xxx=545~590W)
- Black frame
- Bifacial transparent
- Full black

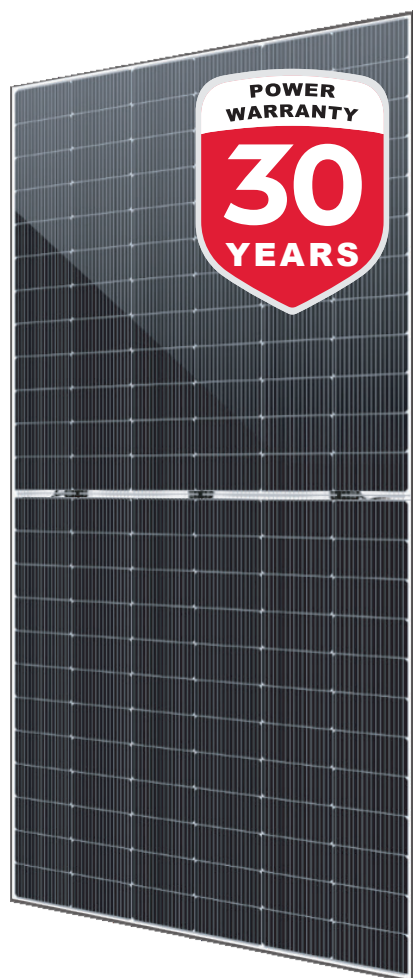

30 Yr quality guarantee | 30 Yr power warranty

■ SUNPRO TOPCon module (Additional value from 30-year warranty)
 □ Common module

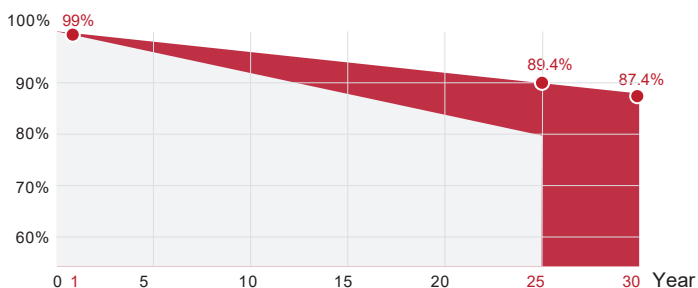

*SUNPRO Standard tiered warranty



WARRANTY & GUARANTEE

Linear output power guarantee
25 years: 89.4% power output
30 years: 87.4% power output



WITHSTAND STRONG

Snow load 5400Pa
Wind load 2400Pa



PID RESISTANCE

Power positive tolerance: $\pm 3W$.
The attenuation probability of PID phenomenon is minimized through battery production technology optimization and material control



R&D AND PRODUCTION

Advanced production line. Bifaciality > 80%, effectively improves backside power generation. The leading solar cell cutting process and multi busbar design with SUNPRO Technology.



HIGH EFFICIENCY

N-type, Components have better reliability and lower LID/LETID attenuation. Efficiency can reach 22.83%. Excellent low light performance. Higher power output under the conditions of haze, overcast, etc.

Electrical parameters at standard test conditions (STC:AM=1.5, 1000W/m², Cells Temperature 25°C)

Typical type	545W	550W	555W	560W	565W	570W	575W	580W	585W	590W
Max power(Pmax)	545	550	555	560	565	570	575	580	585	590
Max power voltage(Vmp)	41.6	41.73	41.86	41.99	42.13	42.26	42.41	42.56	42.72	42.87
Max power current(Imp)	13.11	13.18	13.26	13.34	13.41	13.49	13.56	13.63	13.7	13.77
Open circuit voltage(Voc)	50.42	50.56	50.7	50.84	50.98	51.13	51.28	51.43	51.58	51.7
Short circuit current(Isc)	13.89	13.95	14.01	14.07	14.13	14.2	14.27	14.34	14.41	14.48
Module Efficiency(%)	21.09	21.28	21.48	21.67	21.86	22.06	22.25	22.44	22.64	22.83
Bifaciality Coef (φPmax/φVoc/φIsc)	80%/95%/80%									
Max system voltage	DC 1500V(TÜV) / 1500V(UL)									
Maximum Series Fuse Rating	30A									

Electrical Characteristics with 15% Rear Side Power Gain


Front power Pmax/W	545W	550W	555W	560W	565W	570W	575W	580W	585W	590W
Total power Pmax/W	626.75	632.5	638.25	644	649.75	655.5	661.25	667	672.75	678.5
Vmp/V(Total)	41.60	41.73	41.86	41.99	42.13	42.26	42.41	42.56	42.72	42.87
Imp/A(Total)	15.07	15.16	15.25	15.34	15.42	15.51	15.59	15.67	15.75	15.83
Voc/V(Total)	50.42	50.56	50.70	50.84	50.98	51.13	51.28	51.43	51.58	51.7
Isc/A(Total)	15.97	16.04	16.11	16.18	16.25	16.33	16.41	16.49	16.57	16.65

Electrical parameters at NMOT test conditions

(Irradiance 800W/m², Ambient Temperature 20°C, AM 1.5, Wind Speed 1m/s)

Typical type	545W	550W	555W	560W	565W	570W	575W	580W	585W	590W
Max power(Pmax)	408	411	417	421	425	429	433	436.7	437.3	441
Max power voltage(Vmp)	38.80	38.90	39.30	39.50	39.7	39.7	39.9	40.1	39.9	40
Max power current(Imp)	10.51	10.56	10.62	10.67	10.72	10.79	10.85	10.9	10.96	11.02
Open circuit voltage(Voc)	47.20	47.40	47.70	47.90	48.1	48.2	48.4	48.5	48.3	48.4
Short circuit current(Isc)	11.20	11.24	11.29	11.34	11.39	11.44	11.5	11.56	11.61	11.67

DIMENSIONS AND STRUCTURE

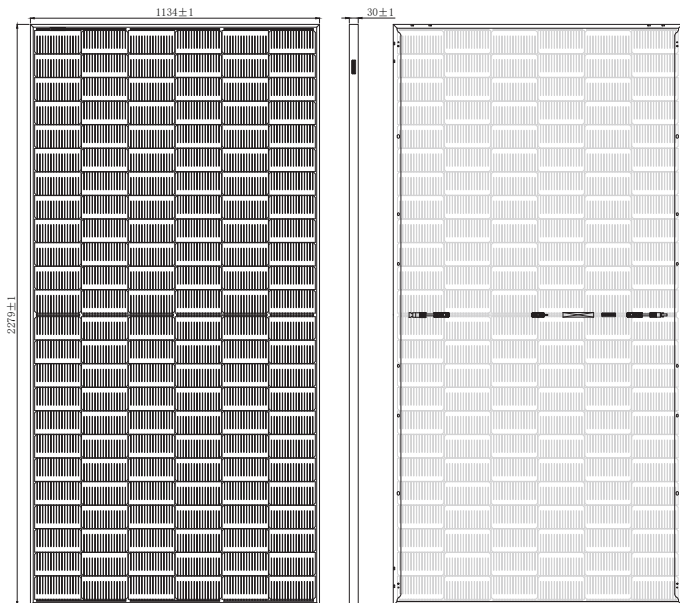

Mechanical Data


Dimensions	2279x1134x30mm
Weight	32kg
Glass	(F) 2.0mm ultra clear embossed double layer colorless glass (B) 2.0mm semi-tempered glass
Output cables	4mm ² , symmetrical lengths 1300mm
Cell type	N type Mono-Crystalline, 16BB, 182x91mm
Number of cells	144cells (Half-Cell)
Connectors	NINGBO GZX PV TECHNOLOGY CO.,LTD PV-GZX1500,1500VDC,39A,IP68

Temperature Characteristics

Packing Configuration

Temp.Coeff.of Isc(TK Isc)	0.046%/°C	Container	40'HQ
Temp.Coeff.of Voc(TK Voc)	-0.25%/°C	Pieces per pallet	31
Temp.Coeff.of Pmax(TK Pmax)	-0.30%/°C	Pallets per container	20
Operating temperature	-40~+85°C	Pieces per container	720
Normal operating cell temperature	45±2°C		

I-V CHARACTERISTICS AT DIFFERENT IRRADIATION

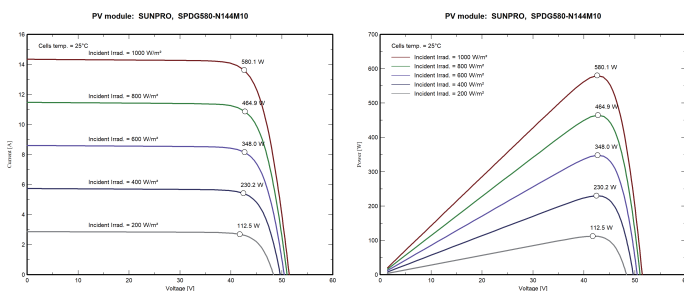

Tests, Certifications and Warranties

Standard tests	IEC 61215, IEC 61730
System certs	ISO 9001, ISO14001, ISO45001 OHSAS 18001, SA 8000
Certifications	TÜV, CE, CEC, WEEE, INMETRO FIRE CERTIFICA C1
Extreme wind and snow loads testing	Withstand extreme wind(2400 Pascal) and snow loads(5400 Pascal)
Power tolerance	±3%
Junction box	IP 68
Warranties	30 years product warranty and 30 years 87.4% of power
Fire class rating	Class C